
REFLECTOR




00862



01440

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.

For the installation of the spare-part, it is necessary to consult a qualified electrician.

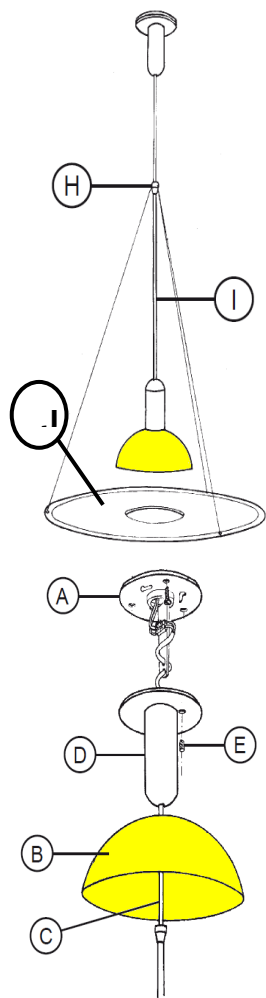

Remove the Plexiglas diffuser (J) by unhooking the steel suspension wires from the “tipe” rod clamp (H);
Remove the ceiling rose (D) by unfastening the screw (E) and then disconnect the lamp electrical wires from the electrical terminal box;

Remove the electrical cable from the wall attachment (A) and ceiling rose (D) and then remove the reflector (B) from the “tipe” rod (I);

Install the new reflector by inserting it through the electrical cable (C) and through the “tipe” rod (I) and then install the appliance (refer to installation sheet).