


RF28209

BLACK LED ARDITI DIMMER 4W - 25W




WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.

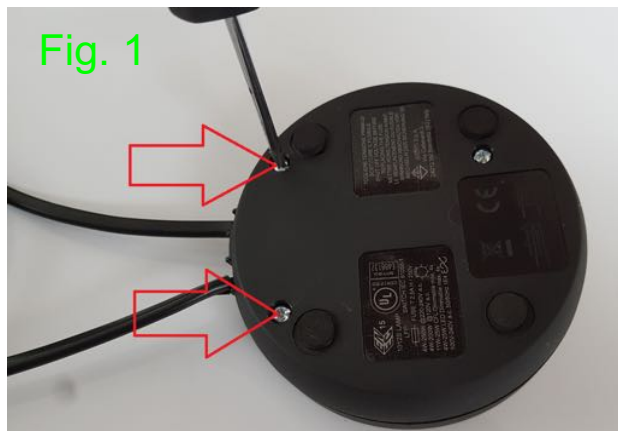


Open the box of the damaged dimmer.

For the opening, it is necessary to unfasten the 2 fixing screws (**red arrows** - refer to Fig. 1). Turn the dimmer box and remove the terminal cover (refer to Fig. 2).



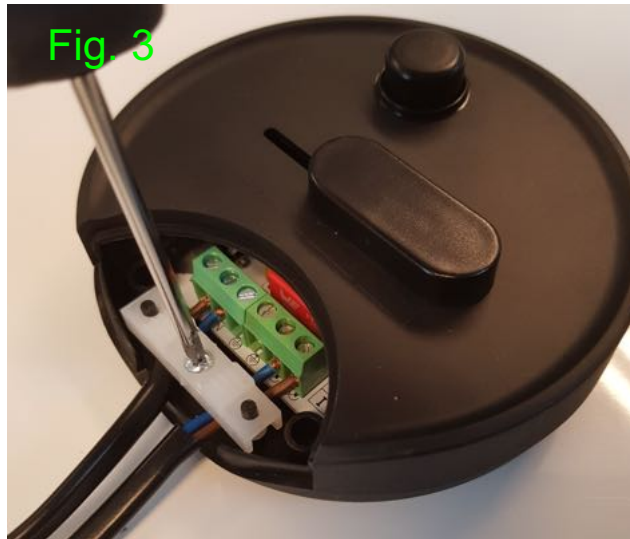

Unfasten the screw of the cable clamp (refer to fig. 3).

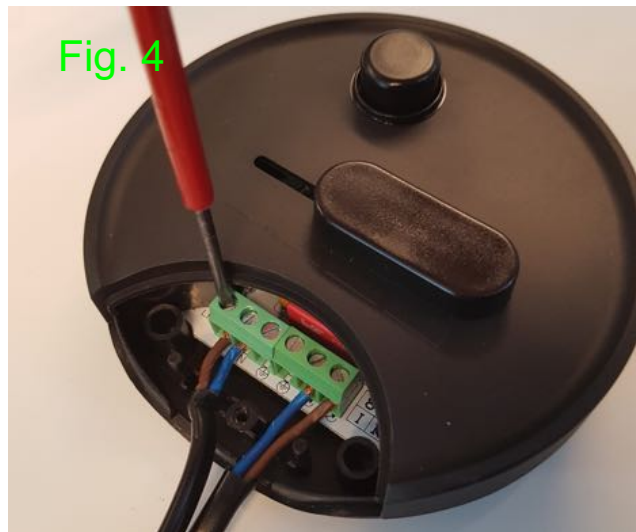

Remove the cable clamp and disconnect the wires from the green terminal box (refer to fig. 4).

Assemble now the new dimmer:
Connect the conductors respecting the polarities, lock the cables by positioning the cable clamp and then fasten the screw, cover the green terminal box with the cover, turn the dimmer box and fasten back the two screws.

DIMMER TECHNICAL DATA SHEET

DIMMER 1012S LAMP LFP SW1A 100-240V BL M

Universal table/floor dimmer for incandescent, cfl and led retrofit lamps, with additional built in push button switch. This model has minimum brightness adjustable and protection for end of life lamps

- Integrated load failure protection (LFP)
- Minimum brightness adjustable
- For flat and round cables
- Memory on last dimming level
- Equipped with earth terminal

Max 4 dimmable lamps with cfl or led load.

