

05187


CABLE TIGHTENER




WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

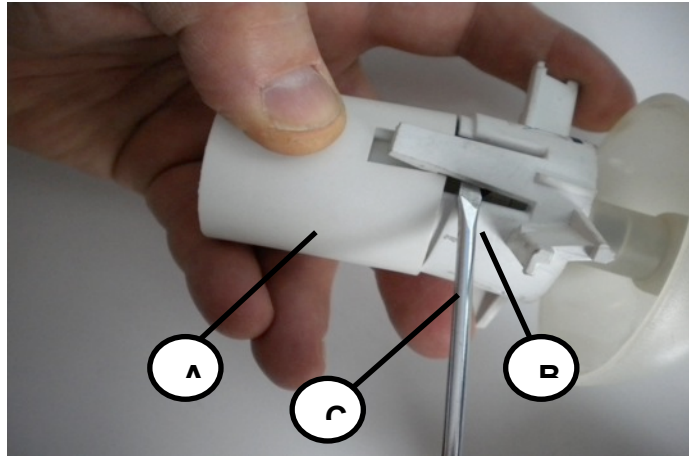


Remove the lampholder (A) from the lampholder support (B), by slightly lifting the 2 lateral side clips with a flat screwdriver (C);

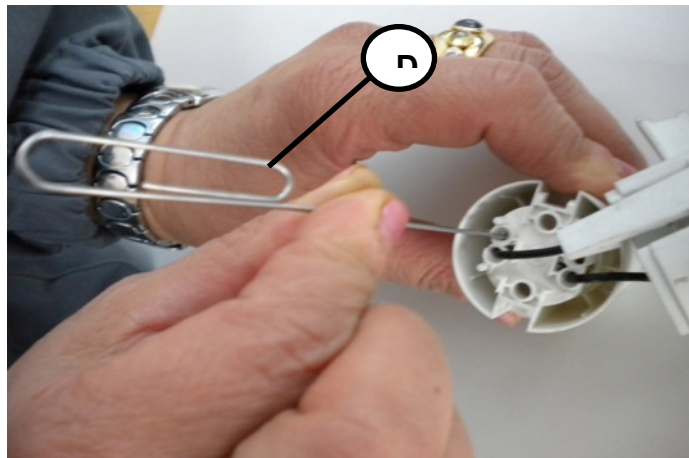



Disconnect the electrical wires from the lampholder by pressing the push terminals with a paper clip (D).

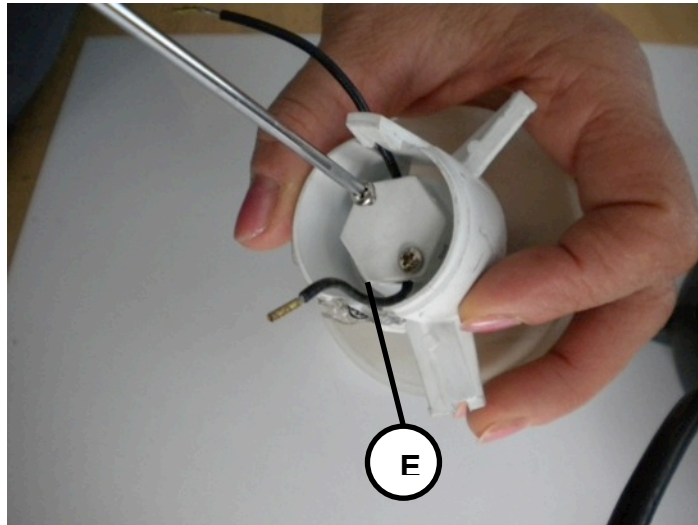

Remove the cover (E) of the cable tightener by unfastening the 2 screws utilizing a crosshead screwdriver.

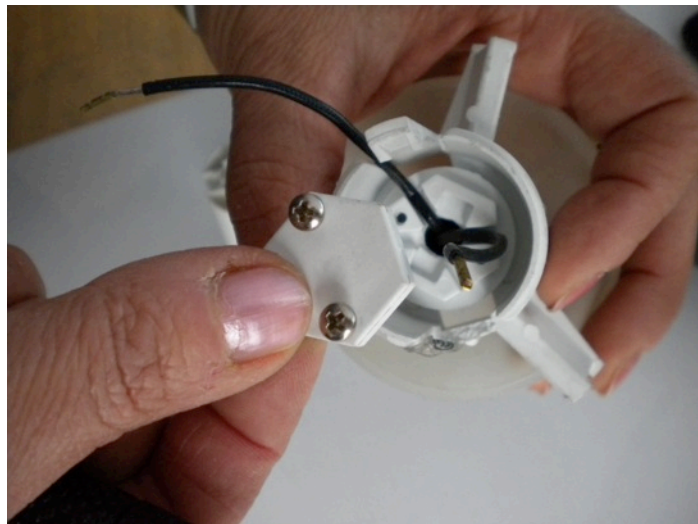

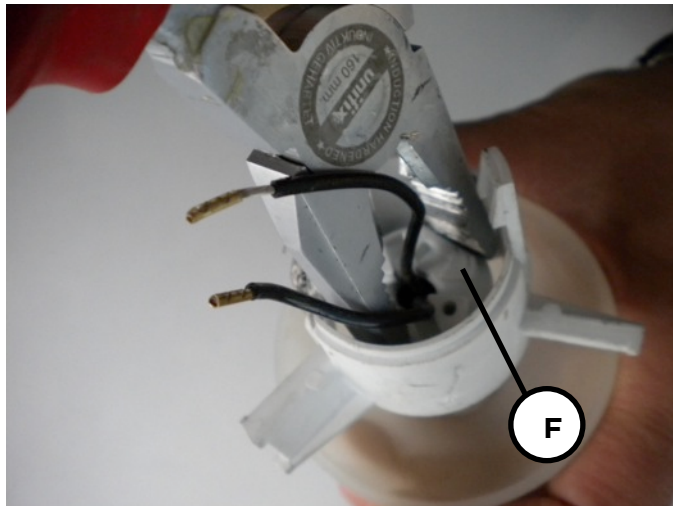

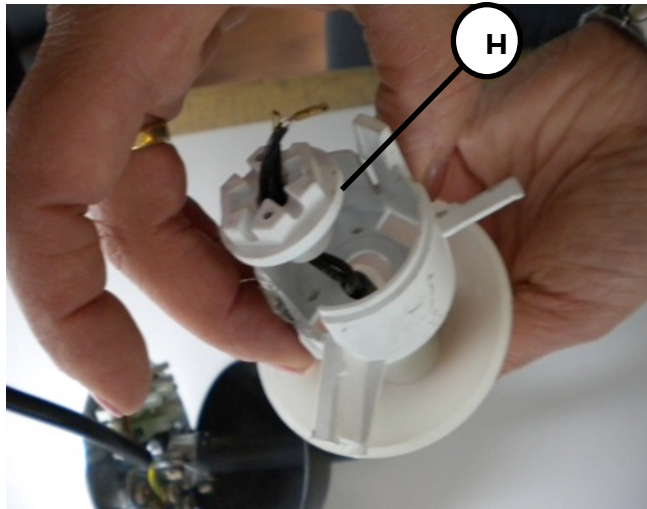

Slip-off from the lamp structure the cable tightener (H);
Assemble now the new spare-part:
Insert the cable tightener with cover, connect the electrical
wires to the lampholder push-terminals and lock the
lampholder to the support through the lateral clips.

