

---


**05806**

**PLEXIGLASS DIFFUSER**



**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off.

For the installation of the spare-part, it is necessary to consult a qualified electrician.

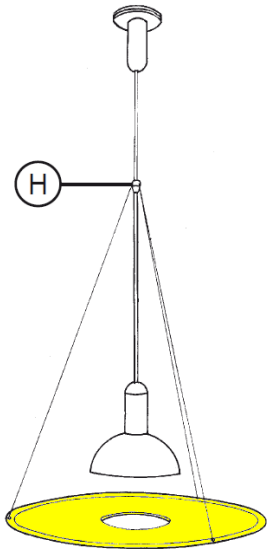

Remove the Plexiglas diffuser (G) by unhooking the steel suspension wires from the “tigr” rod clamp (H);

Slide-out the 3 suspension wires (F) from the plexiglass diffuser (G).

Assemble now the new spare-part:

Insert the 3 steel suspension wires (F) through the holes of the plexiglass diffuser (G) and then hook the plexiglass diffuser (G) through the suspension wires to the “tigr” rod clamp (H).

