
RF1951100


KIT OF SNAP SPRINGS AND FIXING SCREWS



FLOS U.S.A., Inc. 110 York Street, 5th Floor, Brooklyn, NY 11201 | Tel: 718-875-3472 | Email: e-shop@flosusa.com | <http://usa.flos.com>

This document is exclusive property of Flos S.p.A. and its affiliated companies.


WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

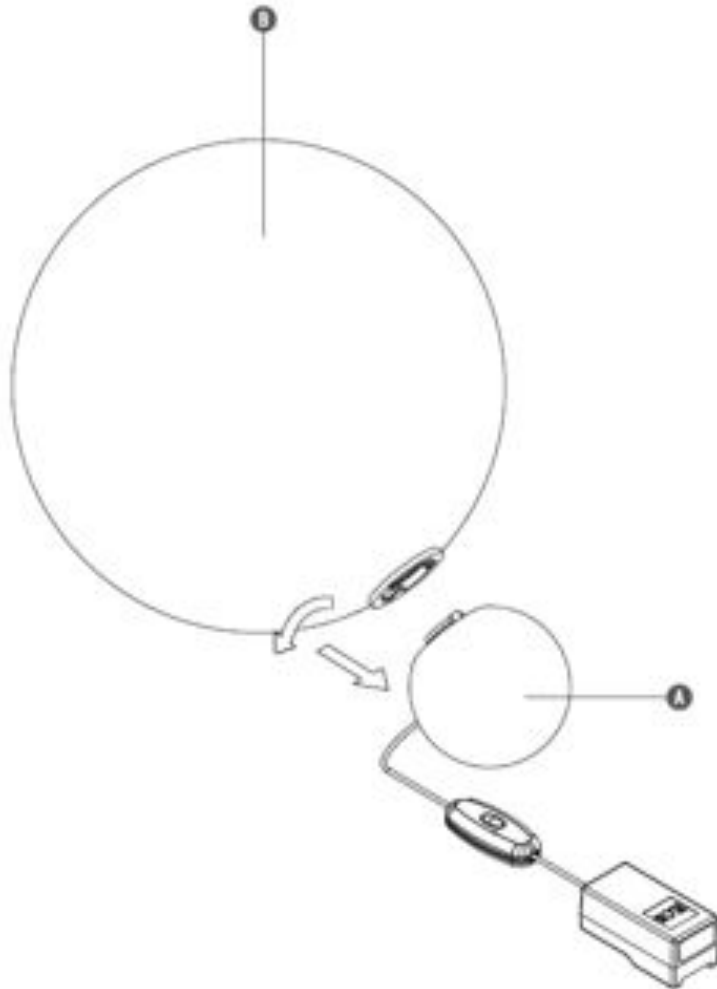


Insert the plug (E) into the feeder unit (F).
By using the guides, snap the plug inside its
opposite slot (use the correct type of plug for
the country in which the device must be
installed).

NOTE: to disconnect the plug from the power
unit press the button (G).

Remove the diffuser (B) from the body (A) by
unfastening it by turning it counterclockwise.

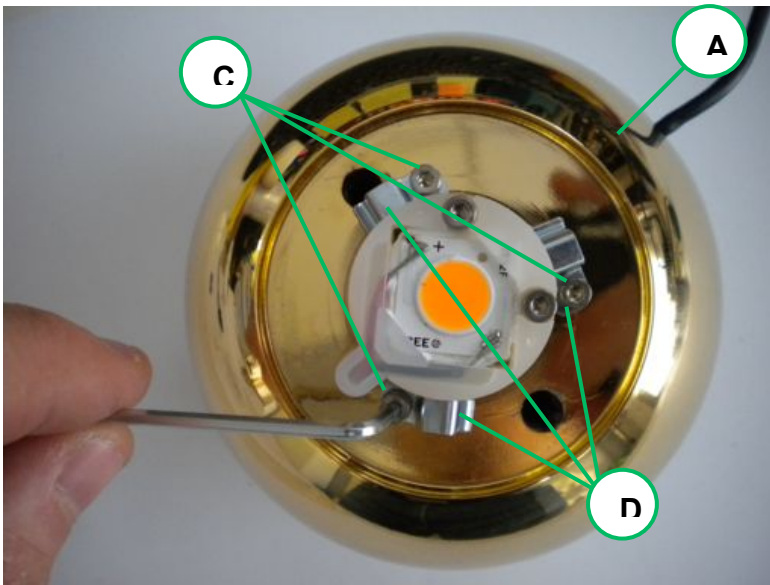


Unfasten the 3 screws (C) from the body (A), by utilizing an Allen key and then remove the damaged snap springs (D).

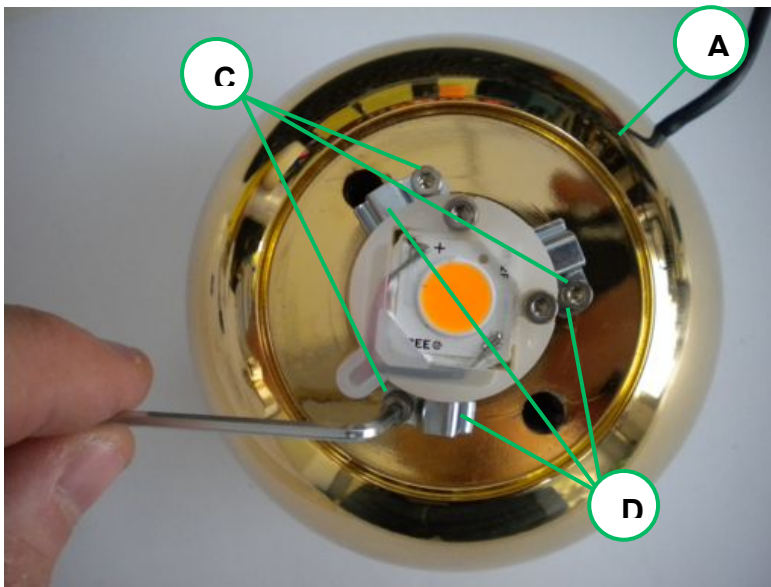

Assemble now the new spare-part:

Install the snap springs (D) on the body (A) and fasten back the screws (C).

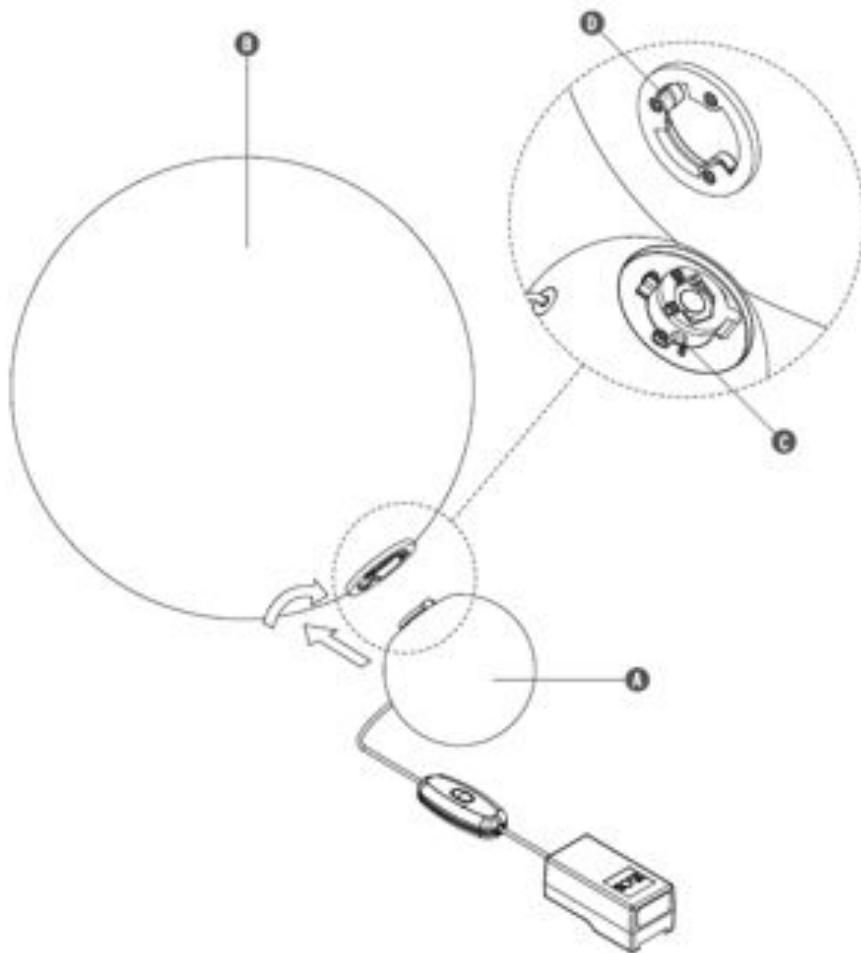

Position the body (A) on the diffuser (B) so that the body's 3 snap springs (C) are inserted into the slot (D) in the diffuser's ferrule and lock it by turning it slightly clockwise.