


RF26254


ELECTRONIC PCB TOUCH DIMMER

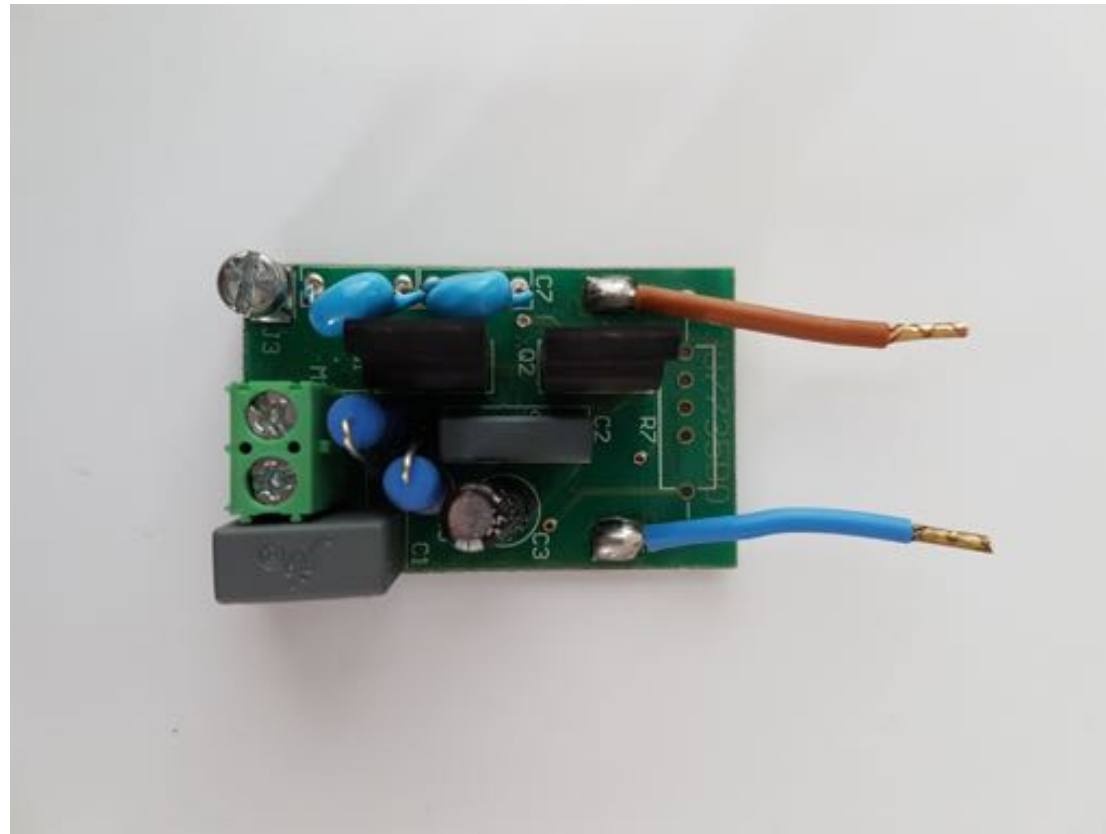


WARNING!!! The Touch dimmer is not compatible with the old resistive Snoopy version.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.

For the installation of the spare-part, it is necessary to consult a qualified electrician.

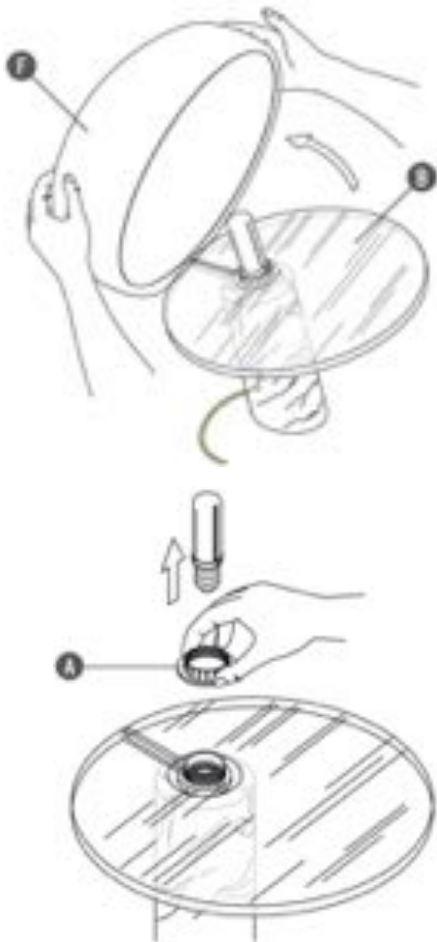


WARNING!!! The Touch dimmer is not compatible with the old resistive Snoopy version.

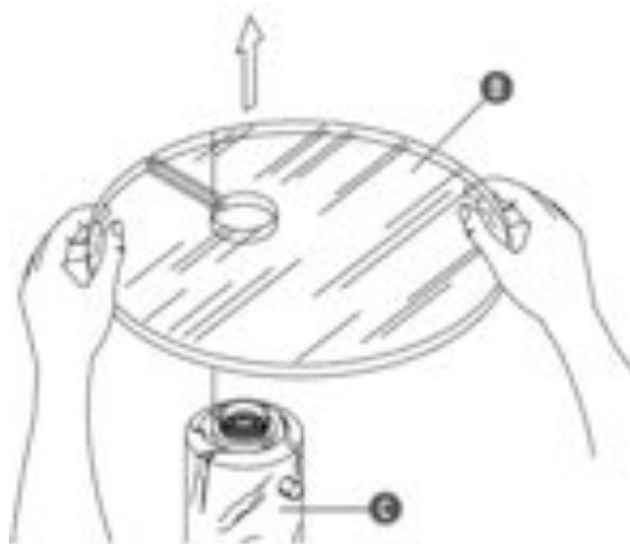

Remove the reflector (F) from the glass diffuser (B).

Remove the lamp-bulb and unfasten the locking ring nut (A).

Delicately remove the glass diffuser (B) from the lamp body (C).

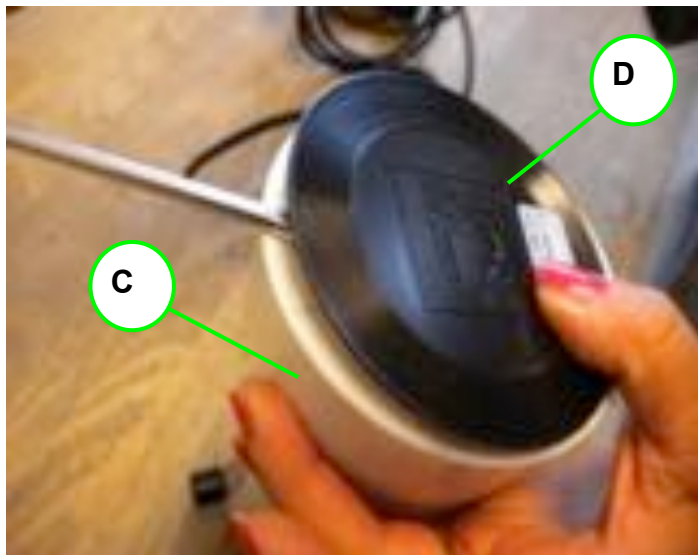


Turn upside down the lamp body (C) and remove the black base cover (D) by utilizing a flat screw driver.





By utilizing a tiny flat screw driver, carefully push towards the inside the side spring of the lampholder in away to free the sleeve of the lampholder.



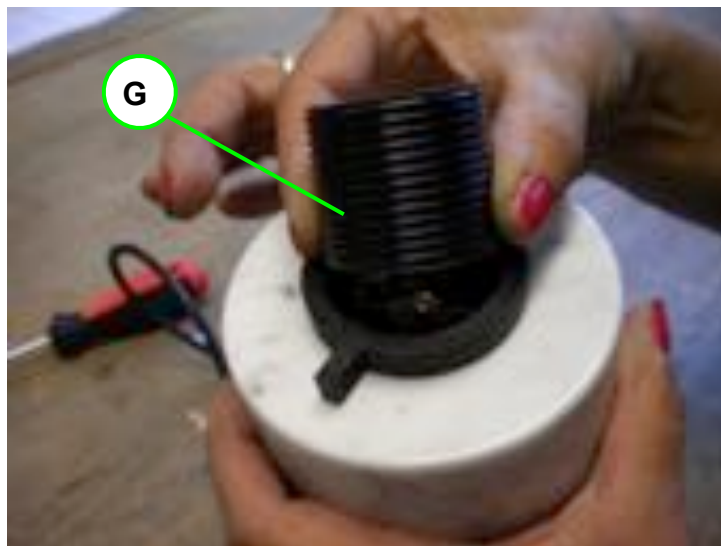


Remove the sleeve (G) from the lampholder assembly by unfastening it.
Unfasten the locking screw (H) by utilizing an Allen key.

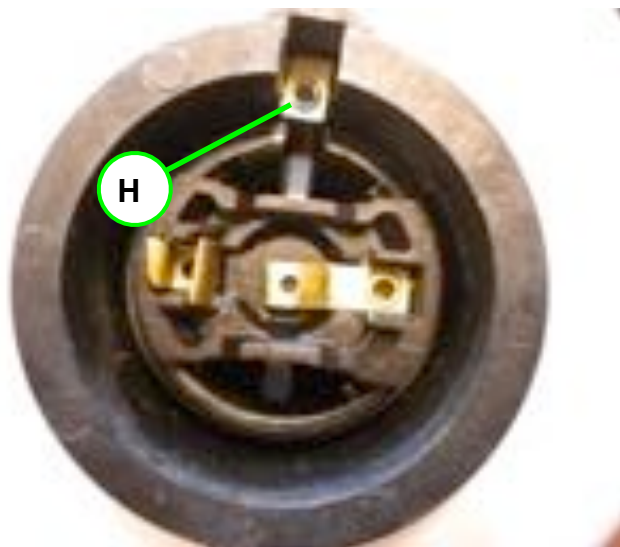


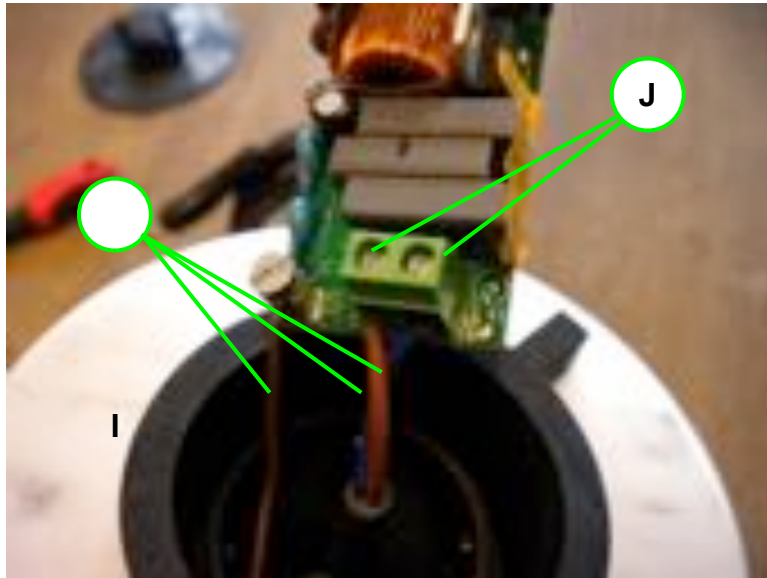

Lift up the lampholder assembly with the touch dimmer (printed circuit board) from the lamp body and free the electrical cable assembly that needs to be replaced by disconnecting the electrical wires (I) through the terminals (J).

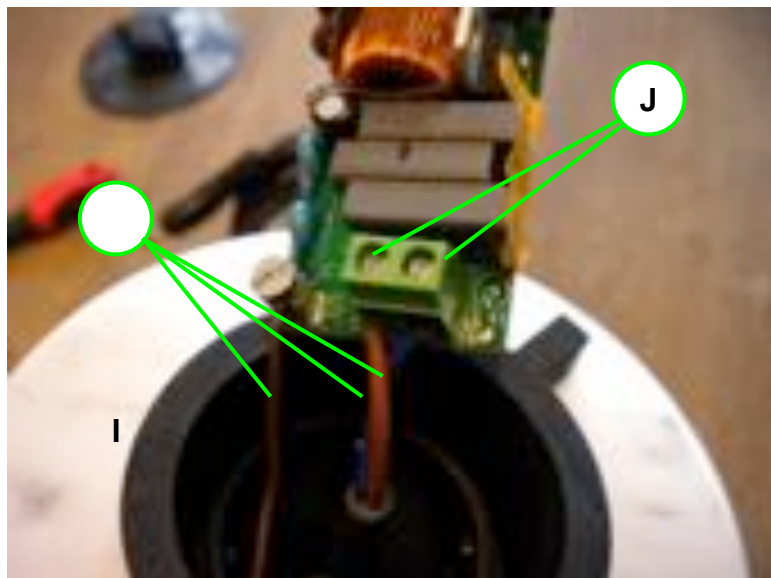



Connect the electrical wires (I) to the touch dimmer by respecting the polarities indicated in correspondence of the connection terminal (J). Connect the Brown (live) wire in the terminal indicated with "L" and then connect the Blue (neutral) wire in the other terminal indicated with "N".

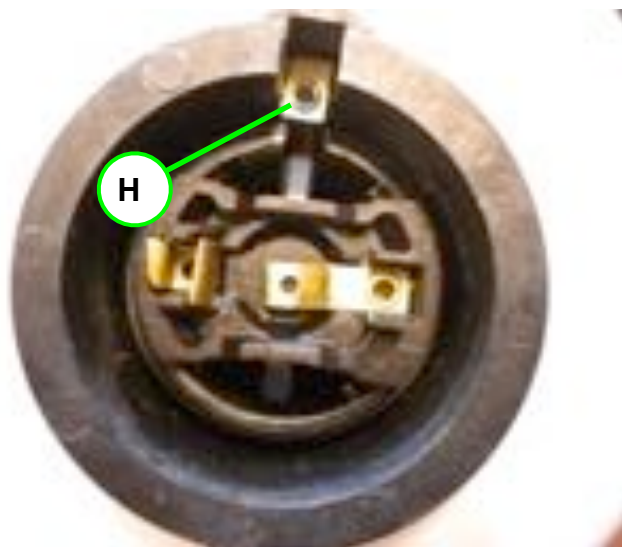


Position back the lampholder assembly onto the lamp body and fasten back the locking screw (H) by utilizing an Allen key.

Screw back-on the lampholder the sleeve (G).

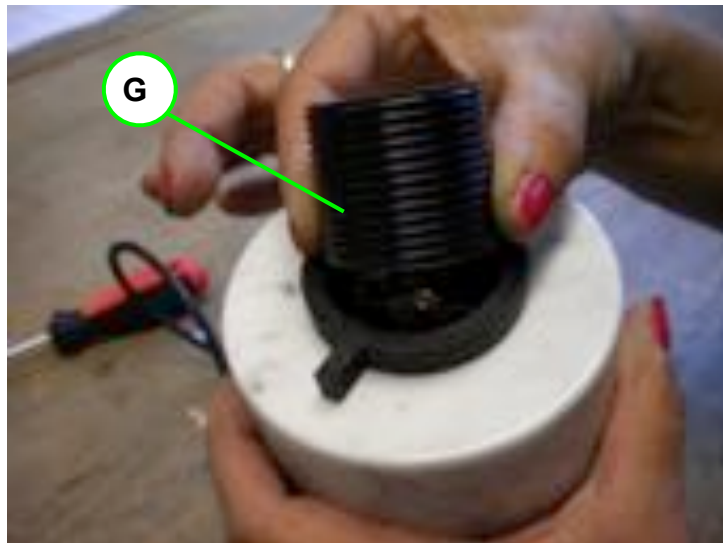

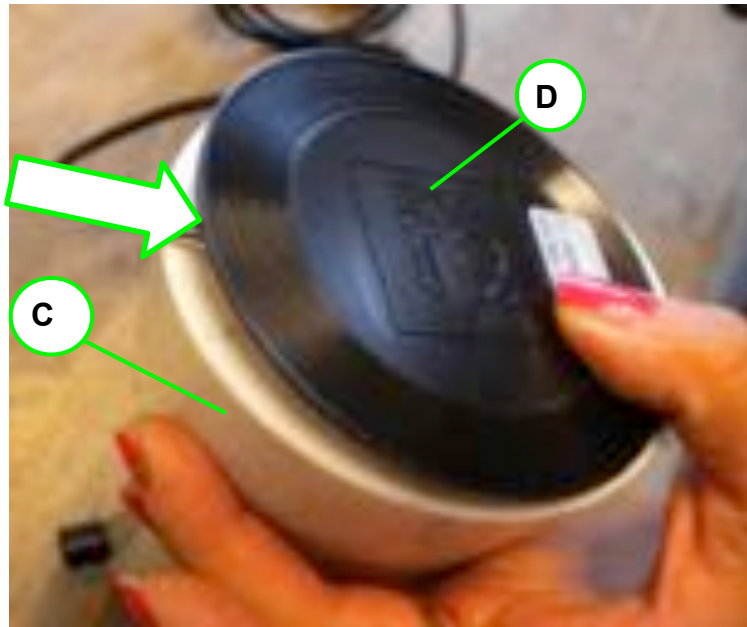


Turn upside down the lamp body (C) and place back the black base cover (D).

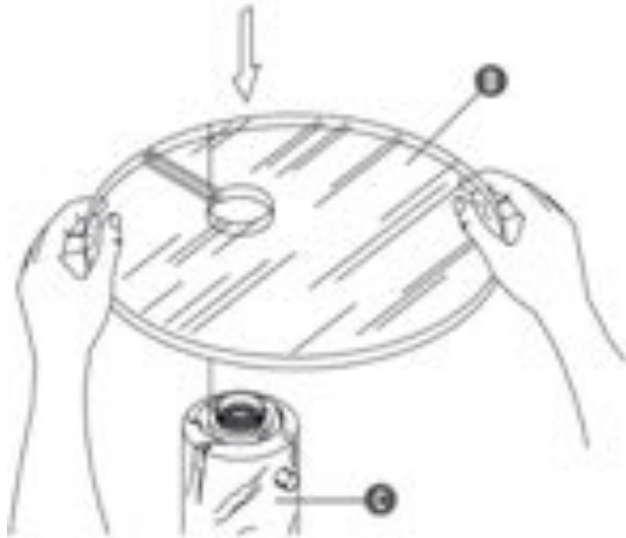

Place the glass diffuser (B) on the main body (C) ensuring that the groove (D) corresponds perfectly to the reference tooth (E).

Lock the glass diffuser (B) by fastening the locking nut (A) and insert the lampbulb.

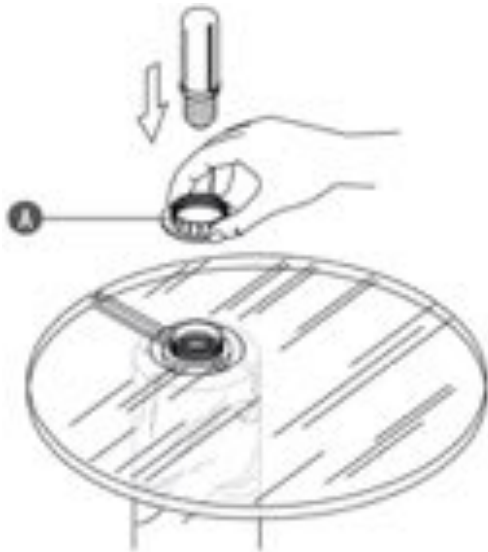



Position the reflector (F) on the glass (B) ensuring that the anti-rotation tooth (G) is inserted in the groove of the glass diffuser.

